

GoldStar AT5200

Battery Operated GPS Tracking Device

Installation Guide




STOP! READ THIS ENTIRE MANUAL BEFORE PROCEEDING WITH THE INSTALLATION OF THIS DEVICE.

Introduction

This installation guide explains the procedure for covertly installing and operating the ATS200 Battery Operated Tracking device (hereafter referred to as “the Tracking Device”) in a vehicle.


Major Components of the Tracking Device

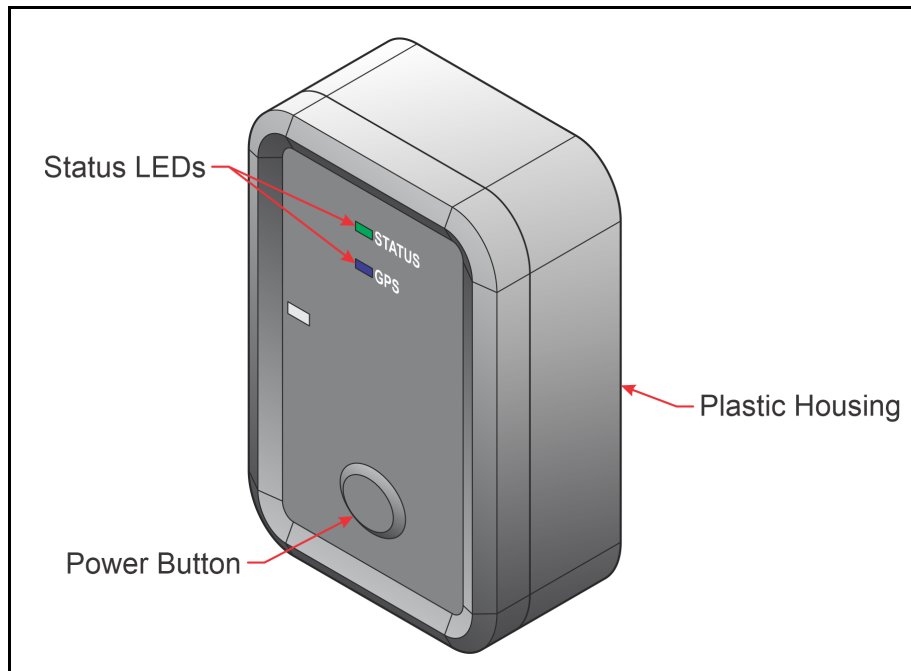

Installation Procedure

Powering Up the Tracking Device

1. Locate the Power Button on the top side of the Tracking Device.
2. Press and hold the Power Button for 3-5 seconds until both the green and blue LEDs turn on.

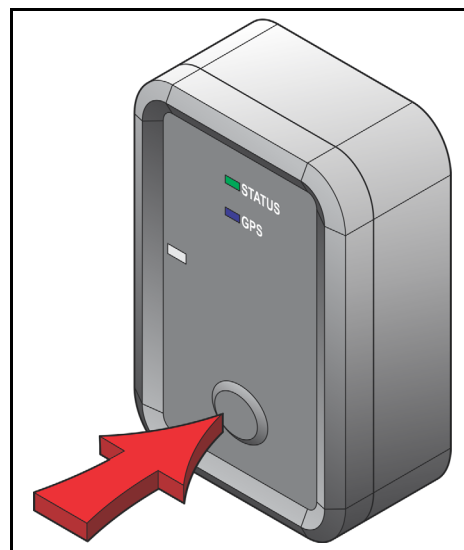

LEDs

The ATS200 has two LED indicators:

Color	Purpose	Action	Meaning
Green LED	Cell Status	Blinking every 1 second	Acquiring signal
		OFF	Signal acquired
Blue LED	GPS Status	Blinking every 2 seconds	Acquiring connection
		OFF	Lock acquired

To preserve battery life, both LEDs will turn OFF once the Tracking Device has acquired cell and GPS connections and the Tracking Device sends in the first event.



Note: After the initial power-up sequence, the Tracking Device will enter sleep mode to preserve battery life. To wake the Tracking Device, press and hold the Power-up Button again.

Mounting Locations

Mount the Tracking Device as high in the vehicle as possible with the LEDs and Power Button facing upwards towards the roof of the vehicle.

Some examples include:

- Behind the knee bolster
- Behind the glove box
- Under the rear deck, above the metal support structure




Caution! Ensure the Tracking Device is not mounted below any metal obstructions. Mount the Tracking Device away from any moving parts (e.g., steering shaft, tilt column, pedals).

Mounting Options

You can mount the Tracking Device in one of two ways:

1. Zip Tie Mounting

- A. Select a mounting point that you can wrap zip ties around.
- B. Wrap the zip ties (supplied in the Device Install Kit) around the Tracking Device and the mounting point, making sure the zip ties fit down into the grooves on the top of the Tracking Device.

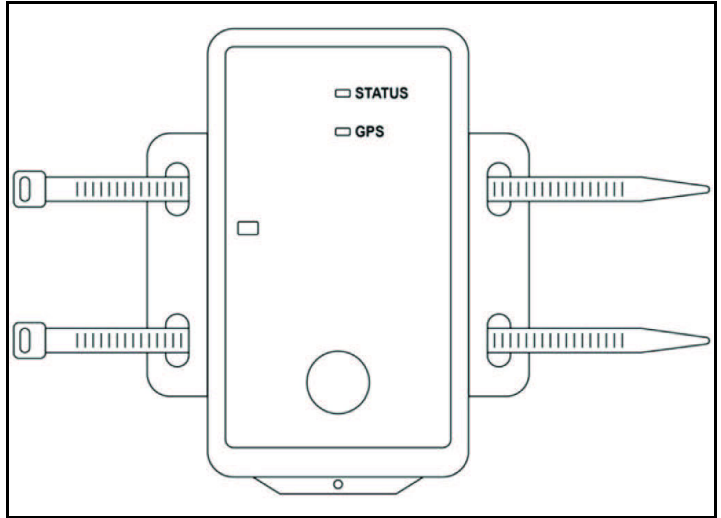

2. Screw Mounting (requires optional Mounting Plate)

- A. Using the M3 x 6 screw (supplied in the Magnetic Mounting Plate Kit), attach the Magnetic Mounting Plate to the bottom of the Tracking Device.
- B. Use the 2 self-drilling screws (supplied in the Magnetic Mounting Plate Kit) to mount the Tracking Device to a rigid surface.

Device Behavior - Mode Definition

The Tracking Device has three operational modes:

Mode	Activation	Purpose
Quick Track	Automatically activated when the Tracking Device powers on	Quickly identifies where the user lives and works
Daily Track	Automatically activated after the Tracking Device establishes a geographic profile of home and work	Automatically reports location of the Tracking Device about once a day
Recovery Track	Manually activated by user	Provides the user with live trip tracking and locate commands



Caution! Recovery Track will severely impact battery life of the Tracking Device. Only use Recovery Track during live repossession scenarios.

This page has been left blank intentionally.



Please contact customer service at:
Phone: [1-877-563-0012](tel:1-877-563-0012) | Email: customer_support@spireon.com